

MAXIMA

SERIE DK

RUOTA IN POLIURETANO 95 Sh/A
POLYURETHANE WHEEL 95 Sh/A


PORTATA - LOAD CAPACITY **Kg. 450 - 800**

Ruota stampata in poliuretano termoplastico 95 Sh/A. L'anello battistrada in poliuretano, è sovrastampato al corpo centrale in nylon rinforzato con fibre di vetro. Questa soluzione permette di ottenere una notevole capacità di carico senza deformazioni ed una buona silenziosità di movimentazione. Di serie le ruote su cuscinetto a sfere vengono fornite con doppia schermatura stagna 2RS DIN 625.

Thermoplastic polyurethane 95 Sh/A tyre wheel. The tread tyre in polyurethane, is injected on polyamide reinforced with fibre glass core by double mechanic anchoring. This solution gives exceptional load capacity without deformation and very low noise levels when running. The original ball bearings on the wheel are supplied with 2RS water proof DIN 625 as standard.

TEST EFFETTUATO SU UN CARRELLO DOTATO DI 4 RUOTE IN POLIURETANO Ø 160
TEST EFFECTED ON A TROLLEY EQUIPPED WITH 4 POLYURETHANE CASTORS Ø 160

VEDI PAG. 224
 SEE PAG. 225

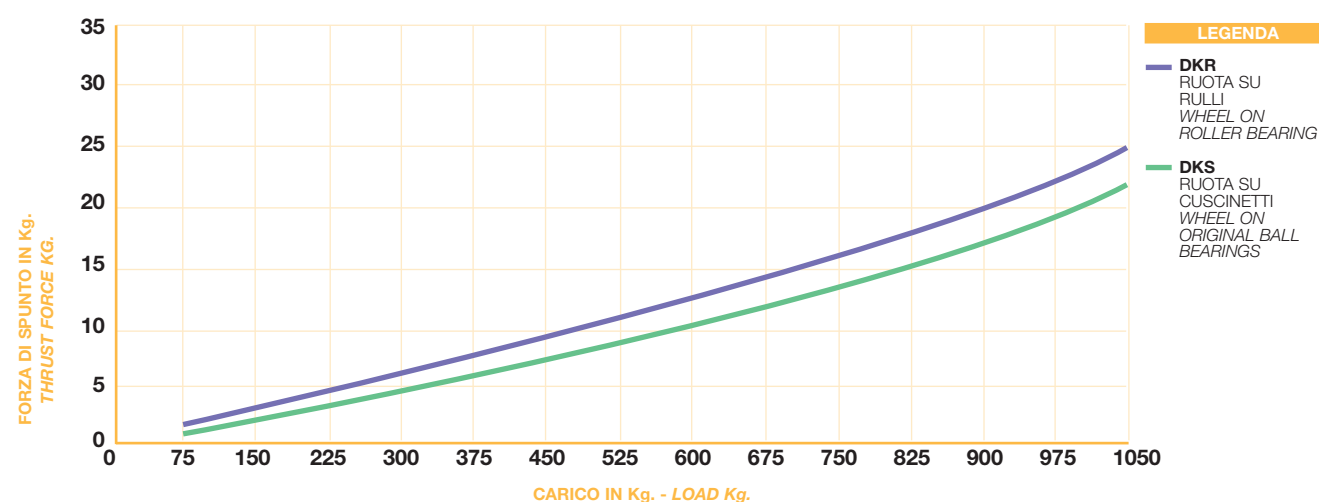

CARATTERISTICHE • FEATURES		
95	DUREZZA • HARDNESS	Sh/A
-40 +75	TEMPERATURA • TEMPERATURE	°C
++	SCORREVOLEZZA • EASY RUNNING	
+	SILENZIOSITA' • NOISELESS	
++	ABRASIONE • SCRATCHING	
++	LACERAZIONE • TEARING	
++	COMPRESSIONE • COMPRESSION	

PAVIMENTAZIONE • KIND OF FLOORING	
++	AMBIENTE ESTERNO • EXTERNAL ENVIRONMENT
++	AMBIENTE INTERNO • INTERNAL ENVIRONMENT
++	CEMENTO • CONCRETE
+	CERAMICA • GRES
-	ASFALTO • ASPHALT
--	STERRATO • ROUGHT TERRAIN
-	GRIGLIATO • MESH
+	TRUCIOLI • IRON CHIPS

RESISTENZA CHIMICA • CHEMICAL RESISTANCE	
+	ACQUA • WATER
+	ACQUA SALATA • SALTED WATER
-	ACETONI • ACETONES
++	ALCOL • ALCOHOL
++	IDROCARBURI • HIDROCARBORS
+	ACIDI DEBOLI • WEAK ACID
-	ACIDI FORTI • STRONG ACID
-	BASI DEBOLI • WEAK BASES
--	BASI FORTI • STRONG BASES
-	SOLVENTI • SOLVENTS
+	OZONO • OZON

++ OTTIMO • VERY GOOD
 + BUONO • GOOD

- MEDIOCRE • RATHER GOOD
 -- PESSIMO • VERY BAD



RUOTA SU RULLI
WHEEL ON ROLLER BEARING



RUOTA SU CUSCINETTI
WHEEL ON ORIGINAL BALL BEARINGS

mm	mm	TIPO TYPE	mm	mm	Kg. (da N)	ART.	TIPO TYPE	mm	mm	Kg. (da N)	ART.
125	46	20-31-48	20	60	450	DKR125x46	6204 2RS	20	50	450	DKS125x46
125	46	INOX AISI 304 STAINLESS STEEL AISI 304	20	60	450	DKX125x46	6005 2RS	25	50	450	DKS126x46
160	46	20-31-48	20	60	550	DKR160x46	6204 2RS	20	50	550	DKS160x46
160	46	INOX AISI 304 STAINLESS STEEL AISI 304	20	60	550	DKX160x46	6005 2RS	25	50	550	DKS161x46
200	50	20-31-48	20	60	650	DKR200x50	6204 2RS	20	50	800	DKS200x50
200	50	INOX AISI 304 STAINLESS STEEL AISI 304	20	60	650	DKX200x50	6005 2RS	25	50	800	DKS201x50