

**MAXIMA**

**SERIE WAS**

**RUOTA IN GOMMA NERA ELASTICA  
 BLACK ELASTIK WHEEL**


PORTATA - LOAD CAPACITY **Kg. 180 - 650**

Ruota in lega di alluminio con rivestimento in gomma elastica nera 70 Sh/A, scorrevole su doppi cuscini a sfere a tenuta stagna DIN 625.

Wheel centre made of aluminium with black elastik rubber 70 Sh/A hub on water proof original balls bearings DIN 625.



**RUOTA SU CUSCINETTI  
 WHEEL ON ORIGINAL BALL BEARINGS**

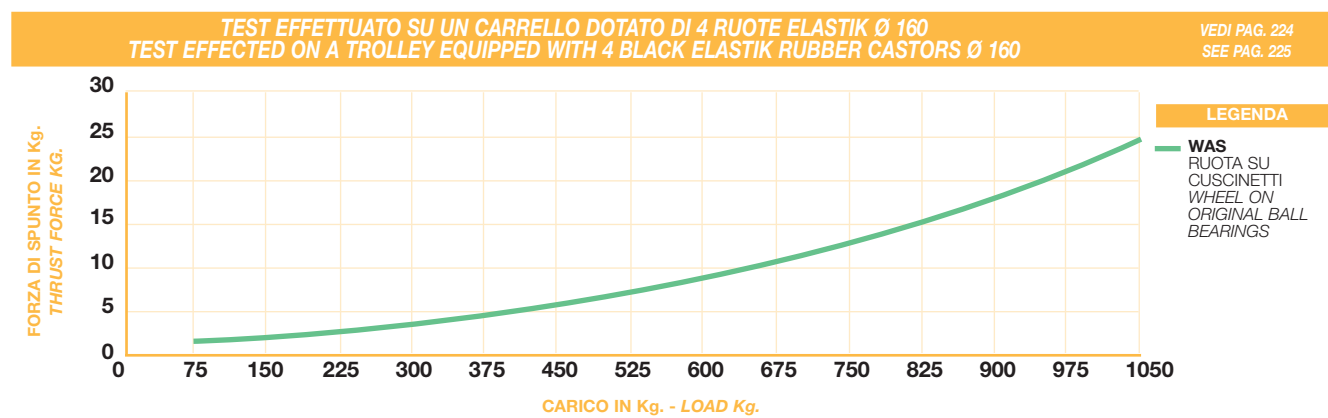

CARATTERISTICHE • FEATURES		
70	DUREZZA • HARDNESS	Sh/A
-20 +85	TEMPERATURA • TEMPERATURE	°C
++	SCORREVOLEZZA • EASY RUNNING	
++	SILENZIOSITA' • NOISELESS	
+	ABRASIONE • SCRATCHING	
+	LACERAZIONE • TEARING	
++	COMPRESSIONE • COMPRESSION	

PAVIMENTAZIONE • KIND OF FLOORING	
++	AMBIENTE ESTERNO • EXTERNAL ENVIRONMENT
++	AMBIENTE INTERNO • INTERNAL ENVIRONMENT
++	CEMENTO • CONCRETE
++	CERAMICA • GRES
++	ASFALTO • ASPHALT
-	STERRATO • ROUGH TERRAIN
+	GRIGLIATO • MESH
--	TRUCIOLI • IRON CHIPS

RESISTENZA CHIMICA • CHEMICAL RESISTANCE	
-	ACQUA • WATER
-	ACQUA SALATA • SALTED WATER
-	ACETONI • ACETONES
++	ALCOL • ALCOHOL
--	IDROCARBURI • HYDROCARBONS
--	ACIDI DEBOLI • WEAK ACID
--	ACIDI FORTI • STRONG ACID
--	BASI DEBOLI • WEAK BASES
--	BASI FORTI • STRONG BASES
--	SOLVENTI • SOLVENTS
+	OZONO • OZON

++ OTTIMO • VERY GOOD  
 + BUONO • GOOD

- MEDIOCRE • RATHER GOOD  
 -- PESSIMO • VERY BAD

mm	mm	mm	TIPO TYPE	mm	mm	Kg. (da N)	ART.
100	40	16	6202 2RS	15	40	180	WAS100
125	50	16	6204 2RS	20	60	225	WAS125
160	50	16	6204 2RS	20	60	300	WAS160
200	50	16	6204 2RS	20	60	400	WAS200
200	50	16	6205 2RS	25	60	400	WAS201
250	50	16	6205 2RS	25	60	500	WAS250
300	60	16	6206 2RS	30	75	650	WAS300