

MAXIMA


SERIE LQ

**RUOTA BLU ELASTIK
 BLUE ELASTIK RUBBER WHEEL**

PORTATA - LOAD CAPACITY **Kg. 200 - 450**

Ruota in gomma blu elastik 70 Sh/A antitraccia. Corpo centrale in nylon 6 scorrevole su rulli o cuscinetti a sfere a tenuta stagna DIN 625.

Wheel with blue elastik rubber tyre 70 Sh/A non marking. Central core made in polyamide on roller bearing or on water proof original ball bearings DIN 625.

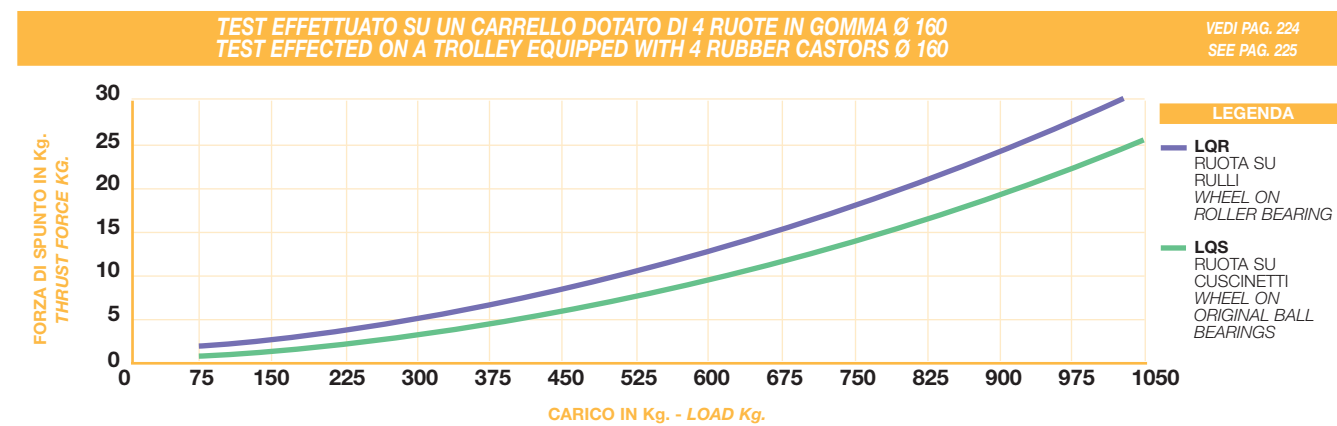

CARATTERISTICHE • FEATURES		
70	DUREZZA • HARDNESS	Sh/A
-20 +80	TEMPERATURA • TEMPERATURE	°C
++	SCORREVOLEZZA • EASY RUNNING	
++	SILENZIOSITA' • NOISELESS	
++	ABRAZIONE • SCRATCHING	
+	LACERAZIONE • TEARING	
++	COMPRESSIONE • COMPRESSION	

PAVIMENTAZIONE • KIND OF FLOORING	
++	AMBIENTE ESTERNO • EXTERNAL ENVIRONMENT
++	AMBIENTE INTERNO • INTERNAL ENVIRONMENT
++	CEMENTO • CONCRETE
++	CERAMICA • GRES
++	ASFALTO • ASPHALT
-	STERRATO • ROUGH TERRAIN
+	GRIGLIATO • MESH
--	TRUCIOLI • IRON CHIPS

RESISTENZA CHIMICA • CHEMICAL RESISTANCE	
++	ACQUA • WATER
++	ACQUA SALATA • SALTED WATER
-	ACETONI • ACETONES
++	ALCOL • ALCOHOL
--	IDROCARBURI • HYDROCARBONS
++	ACIDI DEBOLI • WEAK ACID
--	ACIDI FORTI • STRONG ACID
++	BASI DEBOLI • WEAK BASES
-	BASI FORTI • STRONG BASES
-	SOLVENTI • SOLVENTS
+	OZONO • OZON

++ OTTIMO • VERY GOOD
 + BUONO • GOOD

- MEDIOCRE • RATHER GOOD
 -- PESSIMO • VERY BAD

RUOTA SU RULLI WHEEL ON ROLLER BEARING							RUOTA SU CUSCINETTI WHEEL ON ORIGINAL BALL BEARINGS						
mm	mm		TIPO TYPE	mm	mm	Kg. (da N)	ART.		TIPO TYPE	mm	mm	Kg. (da N)	ART.
100	32		12-23-32	12	40	200	LQR100	—	—	—	—	—	—
100	32		INOX AISI 304 STAINLESS STEEL AISI 304	12	40	200	LQX100	—	—	—	—	—	—
125	40		15-23-40	15	48	250	LQR125	☑	6202 2RS	15	48	300	LQS125
125	40		INOX AISI 304 STAINLESS STEEL AISI 304	15	48	250	LQX125	—	—	—	—	—	—
160	50		20-32-47	20	58	300	LQR160	☑	6204 2RS	20	60	350	LQS160
160	50		INOX AISI 304 STAINLESS STEEL AISI 304	20	58	300	LQX160	—	—	—	—	—	—
200	50		20-32-47	20	58	400	LQR200	☑	6204 2RS	20	60	450	LQS200
200	50		INOX AISI 304 STAINLESS STEEL AISI 304	20	58	400	LQX200	☑	6005 2RS	25	60	450	LQS201
250	50	—	—	—	—	—	—	☑	6205 2RS	25	60	500	LQS250